



15" LED Canopy Light



Date:..... Location:

Product:.....Project:.....

Quantity:.....Catalog#

FEATURES

- 15" square, 150W LED, 20100LM output, UL DLC LISTED
- Easy installation, surface mount or 3/4" thread conduit pendant.
- Ultra slim design, Corrosion and rust proof.
- 50,000 hours life time. IP65 rated

SUITABLE APPLICATIONS

- Gas Station or under canopy Lighting

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with white powder-coated finish . high transmission Anti-UV lens.

ELECTRICAL:

Available as 120-277V input. -36°C to 60°C.

OPTICAL SYSTEM:

High Lumen Output LED chips. 120° beam angle.

INSTALLATION&MOUNTING:

Ceiling Surface Mounting or 3/4"thread conduit pendant Mounting,

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end -user environment and application.

PERFORMANCE


Model NO	Power Factor	Wattage	Voltage/Current Input		Lumen output	Kelvin Options
			120V	277V		
LS-NCPV4-150WSAS-WH57	0.9	150W	1.25A	0.54A	20100LM	5700K

15" LED Canopy Light

Electric Characteristic

Specification/Model	LS-NCPV4-150WSAS-WH57
LED Driver	UL LISTED DRIVER
Input power	150W
Lumens output	20100LM
Efficiency	134LM/W
CRI	>72
Color Temperature	5700K
Input voltage	120-277V/AC
Light distribution type	120D
Working temperature	-36+60°C
Junction temperature	<75°C
lamps efficiency	≥90%
Certificate	UL CUL DLC
Equivalent	400-600W MH/HPS


DIMENSION

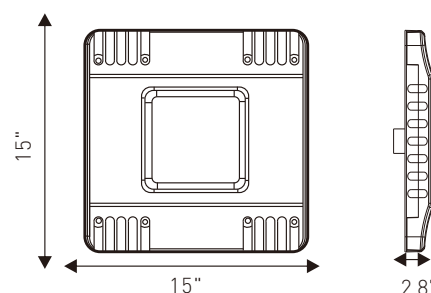

LS-NCPV4-150WSAS-WH57

DISTRIBUTION DIAGRAM

LS-NCPV4-150WSAS-WH57

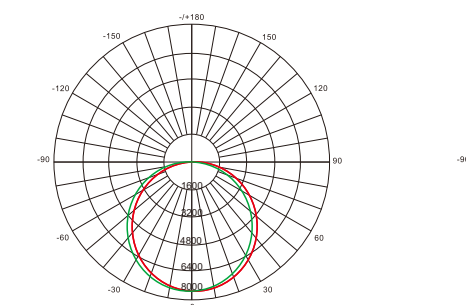

AVERAGE BEAM ANGLE(50%): 118°

UNIT:CD
 Lumens:20100LM
 Test Number:150W
 Test Number:5000K

Installation Manual :

- 1.Fix one side of the accessory safety rope on the back of the fixture(Figure 1).
- 2.Use electric drill to set fixed holes through the ceiling(Figure 2)..
- 3.Fix another side of safety rope on the ceiling, then connect the wire of fixture to main supply according to local electrical connection mode , make sure good protection on the wire joint, after that, fix the fixture on the ceiling with accessory screws(Figure 3).




Figure 1




Figure 2






Figure 3

15" LED Canopy Light



Installation Manual :

- 1.Connect the wiring to the local power supply in the 3/4"NPT Stem (Figure 4).
- 2.Screw the fixture to the 3/4"NPT Stem(Figure 5).



Installation Manual (1) :

- 1.Fix the mounting bracket on the back of fixture by supplied screws.(Figure 6)
- 2.Unscrew the nut from customer supplied 3/4"NPTstem, make the stem hole on mounting bracket through 3/4"NPT stem, then screw the nut back to 3/4"NPT,and fix it.(Figure 7)
- 3.Make wiring connections per"Electrical Connections"section and make sur the good wiring protection



(2)

- 1.Drill the alignment holes on the top ceiling, make them match to the holes on mounting bracket.(Figure 8)
- 2.Insert the supplied rubbers into the alignment holes, then fix the mounting plate on the ceiling by supplied screws. (Figure 9)
- 3.Mount the fixture on the mounting plate by supplied screws.(Figure 10)
- 4.Make wiring connections per"Electrical Connections"section and make sure the good wiring protection.

