


Round Tapered Steel pole

Size: 6" (6" dia.), 6.5" (6.5" dia.), 7" (7" dia.)

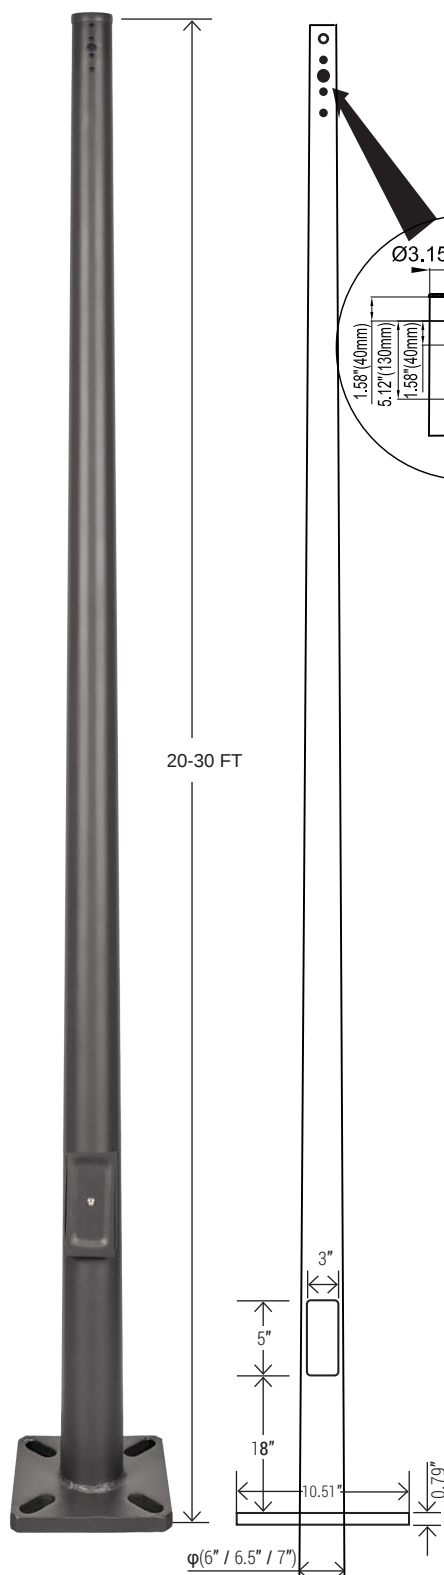

The WSD LED INC Series Round Tapered Steel poles are built from high strength steel tube and are available side drilled for arm mounted area lighting luminaires or with tenon mounts for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 20 to 30 feet can be used based on selected luminaire application.

FEATURES

FINISH:

Textured architectural bronze powder-coat finish, baked to ensure maximum paint adhesion, hardness and durability.

ANCHOR BOLTS:

Anchor bolts are not included, sized based on pole data charts for the selected pole size.

HAND HOLE:

Cast iron reinforced hand hole and cover with ground screw.

BASE COVER:

Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base.

SURFACE TREATMENT: Hot-dip galvanizing.

POLE LENGTH:

Poles are available in standard lengths as shown in the order matrix. Poles can be custom cut to order. Consult factory.

SPECIFICATIONS: Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46,000 PSI.

SPECIFICATION	20FT	25FT	30FT
WSD-TPR20FT6-11G-D			
WSD-TPR25FT6.5-11G-D	L = 6.1 (m)	L = 7.6 (m)	L = 9.1 (m)
WSD-TPR30FT7-7G-D			

MOUNTING OPTIONS



SIDE MOUNT: Standard length poles are predrilled (2@180°), with a polycarbonate top cover and hole plugs for unused predrilled locations.


Note: When using Arm or Slip-Fitter Mounts, additional installation parts may be required to ensure proper installation. (example: Round Bar Adapter with Arm Mount or Horizontal Tenon Arc Adapter with Slip-Fitter Mount) [see: additional installation parts for more options](#)

TOP MOUNT: Round Pole Tenon Adapters (Optional) can be installed for a use with a Slip-Fitter or Multi-Fixture installation requiring Bullhorns, Spokes etc. (3.86" RND to 2 3/8" Round Tenon Adapters available)

Round Tapered Steel pole


Size: 6" (6" dia.), 6.5" (6.5" dia.), 7" (7" dia.)

DIMENSION

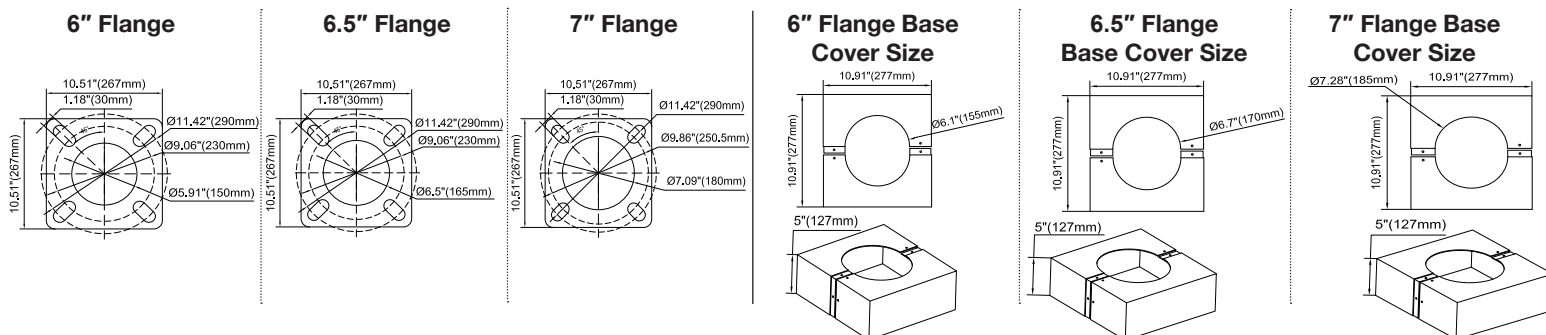

DIMENSION DATA

CATALOG	HEIGHT	GAUGE	SIZE	BOLT SIZE	WEIGHT (LBS)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120	EPA 130	EPA 140	EPA 150	EPA 160
WSD-TPR20FT6-11G-D	20ft	11	6" dia.	M0.75"X 19.69"X 3.94"	123	13.9	11.1	10.8	8.8	7.5	5.8	4.6	3.2	2.0	1.1
WSD-TPR25FT6.5-11G-D	25ft		6.5" dia.		163	12.9	9.9	8.7	7.3	6.6	5.1	4.2	2.8	1.4	NG
WSD-TPR30FT7-7G-D	30ft	7	7" dia.	M0.95"X 36"X4"	300	10.5	8.8	7.9	6.5	5.4	4.4	3.7	2.4	1.2	NG

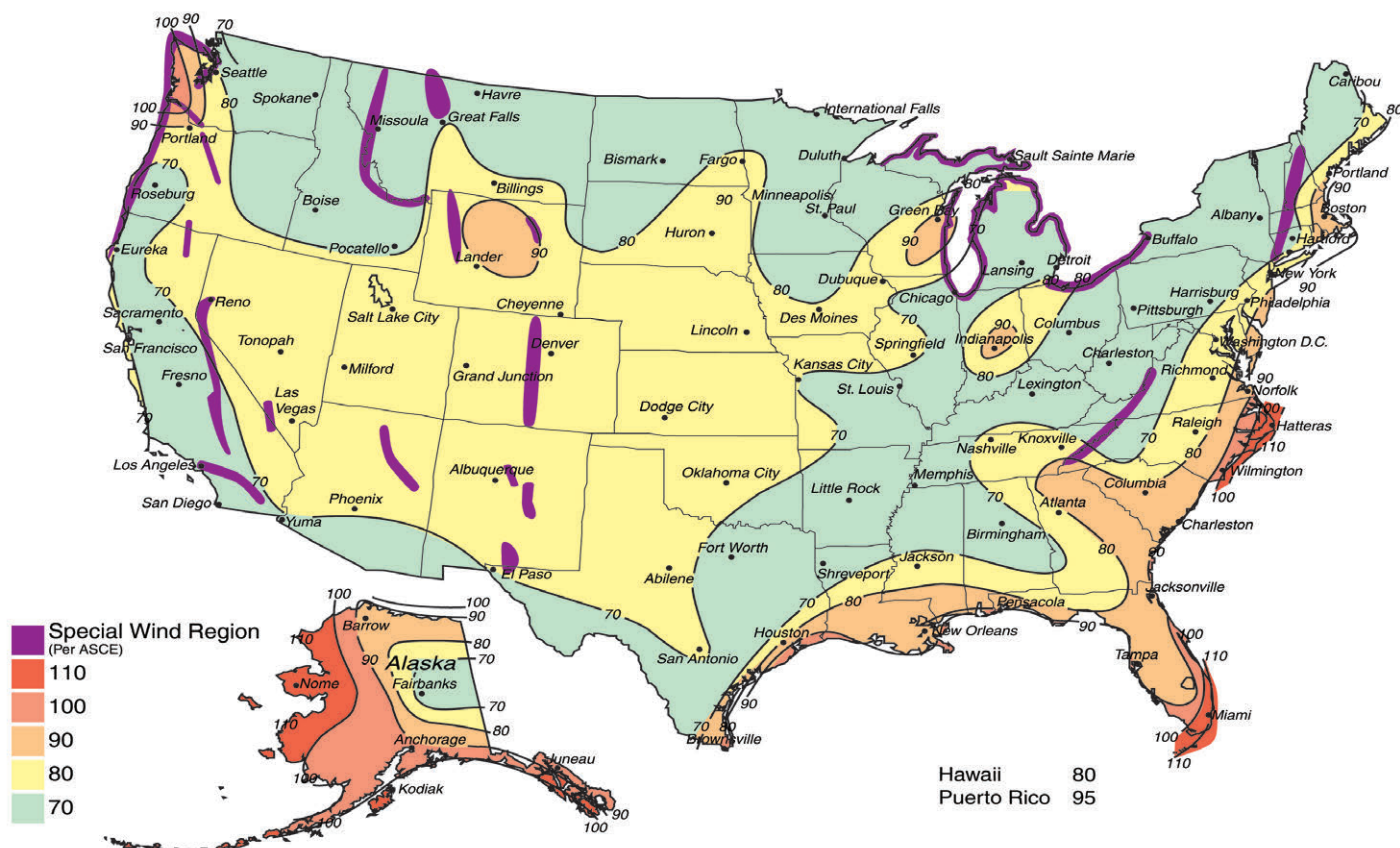


WSD LED INC
Green Lighting Resources


Round Tapered Steel pole

Size: 6" (6" dia.), 6.5" (6.5" dia.), 7" (7" dia.)


Tapered Light Pole Adaptor




Tapered Light Pole Adaptor
WSD-TPVT-D3.86-D
 MAX EPA: 0.3
 Finish: Dark Bronze
 For use with 6inch,6.5inch,7inch Round Tapered Steel pole.



Install Base Shield
WSD-IBSR6-D
 Finish: Dark Bronze
 The 6" Installation of base shield is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.




Install Base Shield
WSD-IBSR6.5-D
 Finish: Dark Bronze
 The 6.5" Installation of base shield is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.




Install Base Shield
WSD-IBSR7-D
 Finish: Dark Bronze
 The 7" Installation of base shield is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.

MOUNTING OPTIONS:




Anchor Bolt Positioning Plate
WSD-SPP-D
 This is a screw rod positioning plate. After the screw rod of the lamp rod base is fixed underground, the positioning plate is fixed with the screw rod to prevent the screw rod from deviation. Finally, the lamp rod is locked.




Base Mounting Screw
WSD-BMS-S
 Before installing the lamp pole, the installation hook should be buried underground and fixed by cement After fixing, the lamp pole should be fixed by locking screw and base installed.

30FT Light Pole Optional Accessories:




Position Plate Bottom

Cross Screw Positioning Plate
WSD-SPP250-BM24
 This is a screw bottom cross positioning plate. It is used in conjunction with the top positioning plate WD-SPP250-TM24 and WSD-BM24SL914-S to fix the positioning plate with the screw to prevent the screw from deviating. Finally, the lamp pole locks.



Anchor Bolt
WSD-BM24SL914-S
 Before installing the lamp pole, the installation hook should be buried underground and fixed by cement After fixing, the lamp pole should be fixed by locking screw and base installed,(It is used in conjunction with WSD-SPP250-BM24 and WD-SPP250-TM24).



Anchor Bolt Positioning Plate
WSD-SPP250-TM24
 This is a screw rod positioning plate. After the screw rod of the lamp rod base is fixed underground, the positioning plate is fixed with the screw rod to prevent the screw rod from deviation. Finally, the lamp rod is locked,(It is used in conjunction with WSD-SPP250-BM24 and WSD-BM24SL914-S).

LIGHT POLE TOP

