

Selectable Hourglass Post Top Light

Wattages: 40W,60W,80W,100W



WATT/CCT
SELECTABLE

LED Selectable Hourglass Post Top Lighting series can be widely used for Outdoor (Wet Location) Excellent for Lawns,Courtyards, Roadways and many other applications.


Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.



FEATURES:

- LED high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die-cast aluminum cooling design, high quality and better cooling for LED $T_j < 85^{\circ}\text{C}$.
- Excellent optics design, greatly improve the light utilization and evenness.
- The 0-10V Dimming type is continuous.
- Motion sensor control available(Optional).

DIMENSION:

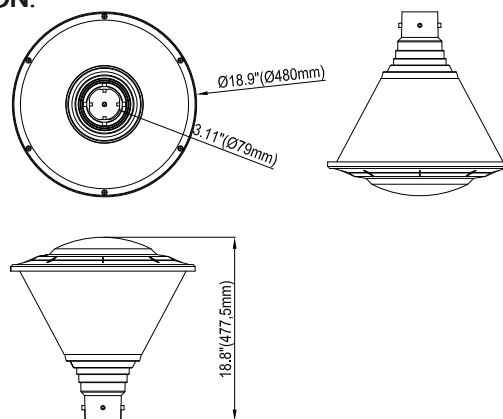

SPECIFICATION

SPECIFICATION				
TYPE	WSD-HPT46810W27-345K-B			
WATTAGE	40W	60W	80W	100W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
LUMEN	6468lm/6777lm/6740lm	8982lm/9553lm/9455lm	11274lm/12004lm/11712lm	13479lm/14730lm/13991lm
EFFICACY	>150 lm/W			
FACTORY SETTINGS	100W & 4000K			
CRI	70			
INPUT VOLTAGE	AC120-277V			
BEAM ANGLE	168°			
POWER FACTOR	0.90			
DRIVER EFFICACY	90%			
LED TYPE	2835			
LIFE SPAN	over 50,000 hrs			
OPERATING TEMPERATURE	-40°F ~ 104°F			
CERTIFICATES	UL/DLC 6.0 Premium			
OUTDOOR RATING	Wet location			
CABLE	3 core, 18AWG (19.69 inch)			
WARRANTY	5 year limited			

Selectable Hourglass Post Top Light

Wattages: 40W,60W,80W,100W



WATT/CCT
SELECTABLE

POWER:40W/60W/80W/100W
CCT:3000K/4000K/5000K

STRUCTURE FEATURES:

- ◆ Shell materials: Aluminum & PC
- ◆ Finish:Black(Standard)
- ◆ Net Weight: 6.0KG (13.23 LBS)
- ◆ Product Size : 480mmX477.5mm
(18.9"X18.8")
- ◆ Carton Size : 500mmX500mmX500mm
(19.69"X19.69"X19.69")

CONTROLS: (SOLD SEPARATELY)



BRI810-B-M10
Microwave Motion Sensor



RC100
Remote Controller

ORDERING INFORMATION

EXAMPLE:

WSD-HPT46810W27-345K-Z[D,W,B,S]-E[Blank,M]

WSD	HPT	46810W	27	345K	Z	E
COMPANY	PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	CONTROL
WSD LED INC	HPT (Hourglass Post Top Light)	4W-(40W) 6W-(60W) 8W-(80W) 10W-(100W)	27 (AC120-277V)	3K - (3000K) 4K - (4000K) 5K - (5000K)	D - (Darkr Bronze) W - (White) B - (Black) S - (Silver)	M -(Motion Sensor)


Selectable Hourglass Post Top Light

Wattages: 40W,60W,80W,100W


PHOTOMETRICS:

For complete IES files, please visit our website.

WSD-HPT46810W27-345K-B (100W&3000K)

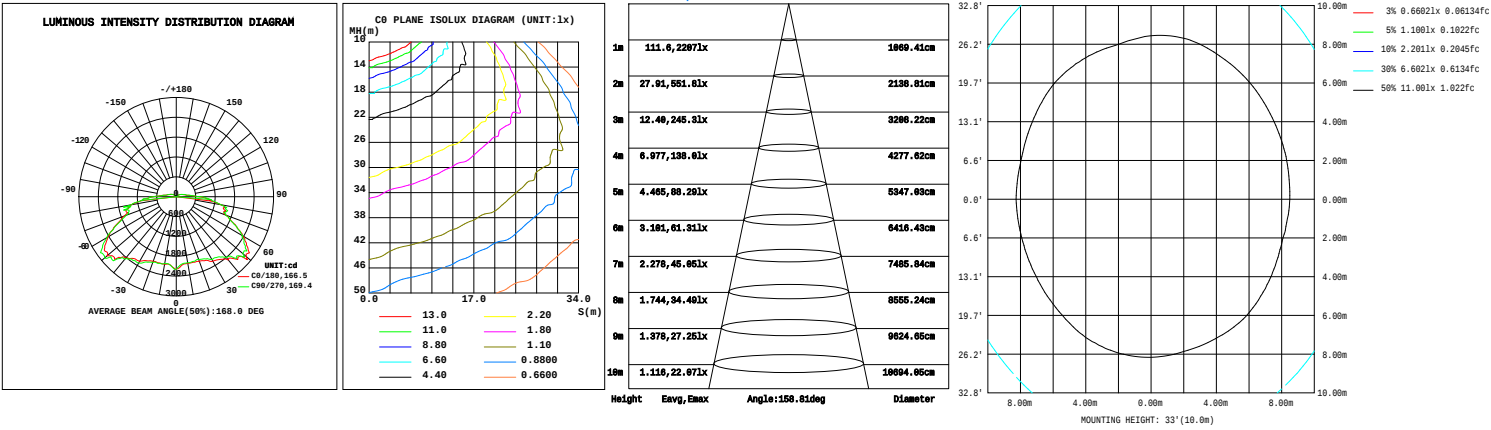

WSD-HPT46810W27-345K-B (100W&4000K)

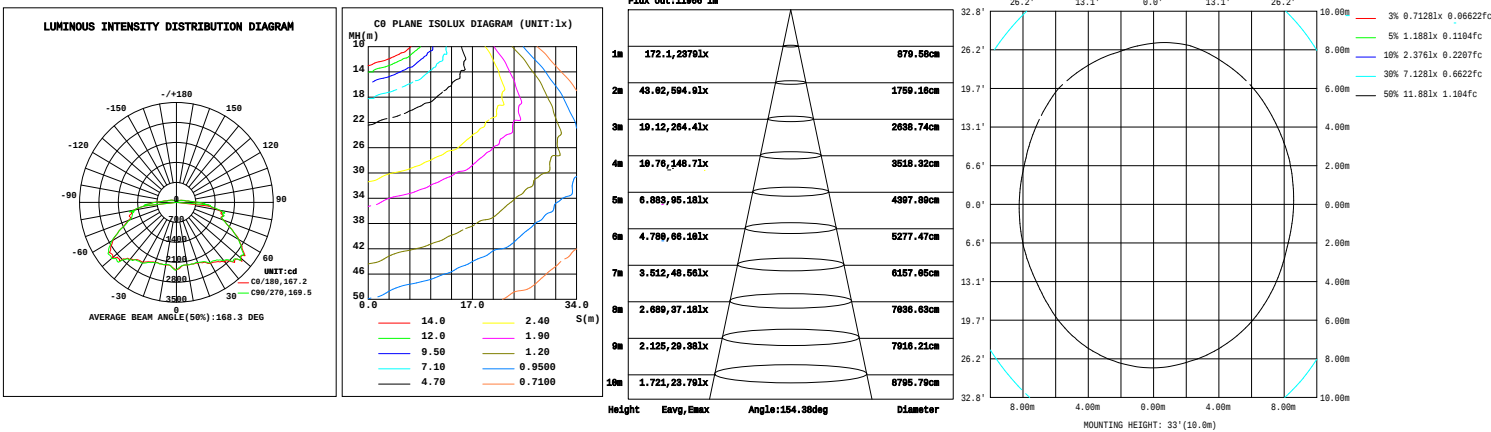

WSD-HPT46810W27-345K-B (100W&5000K)

