


BOL-R = 8.4 lbs.
BOL-S = 12.7 lbs

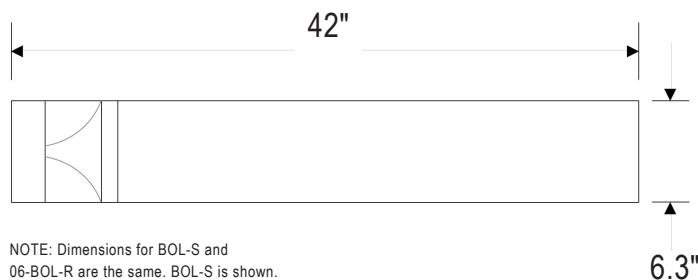

MODEL	STYLE	LUMEN OUTPUT	COLOR TEMPERATURE	REQUIRED MOUNTING MEANS ORDER SEPERATELY
BOL	R = Round S = Square	27L = 2,700 LM	4K = 4000k 5K = 5000k	06-BOL-R-MTGKIT = Anchor bolt for round bollard 06-BOL-S-MTGKIT = Anchor bolt for square bollard

FEATURES

- Available in 4000k (neutral white) and 5000 (cool white) color temperatures*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for > 180,000 hours of operation**, and at least 90% of initial lumen output (L_{90}) for > 54,000 hours of operation†
- LED chromaticity based on < 5-step ANSI quadrangles
- LED color maintenance < 0.001 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation
- 2,700 nominal lumens
- 21 nominal watts
- 0-10vdc dimming drivers, which provide 10% continuous dimming are standard

- Universal 120-277 AC voltage (50-60Hz) is standard
- Power factor > 0.90
- Total harmonic distortion < 20%
- Color rendering index (Ra) > 80. Red color rendering of at least 15
- Cast aluminum housing with dark bronze, powder coat finish
- High-impact, polycarbonate lens
- Easy installation in new construction or retrofit applications

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.

† L_{90} hours are IES TM-21-11 calculated hours.

LIFE HOURS

180,000**

WARRANTY/LISTING

- cULus listed for wet locations in ambient temperatures from -40°C to 50°C (-40°F to 122°F)
- IP65 rated for ingress protection
- Complies with FCC Part 15, class A
- Complies with ICE61000-4-5, input transient surge protection (line-neutral = 4kV; line- & neutral-ground = 6kV)
- Complies with RoHS (Restriction on Hazardous Substances) requirements
- 5-Year Warranty of all electronics and housing

ELECTRICAL DATA

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD ²	L ₇₀ Hours ³
							120V	240V	277V			
BOL-R-27L-4K	4000k	> 80	2,772	22	129	120-277	0.18	0.09	0.08	> 90%	< 20%	180,000
BOL-R-27L-5K	5000k	> 80	2,785	21	130	120-277	0.18	0.09	0.08	> 90%	< 20%	180,000
BOL-S-27L-4K	4000k	> 80	2,739	22	126	120-277	0.18	0.09	0.08	> 90%	< 20%	180,000
BOL-S-27L-5K	5000k	> 80	2,756	21	130	120-277	0.18	0.09	0.08	> 90%	< 20%	180,000

¹ Color rendering index.² Total harmonic distortion.

⁴ L_{70} refers to the number of hours at which lumen output declines to 70% of the initial level. L_{70} hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

BOL-R-27L-5K

Luminaire Data


Description	BOLLARD (ROUND) 27L, 5K
Total Lumens	2,796
Input Wattage	21
Efficacy (lm/W)	131
Max. Cd.	827.74 (45H, 54V)
IES Classification	Type IV
Longitudinal Classification	Very Short

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-30°	157	5.6%
0-60°	1,584	56.7%
0-80°	2,485	88.9%
80-90°	202	7.2%
0-90°	2,687	96.1%
90-110°	77	2.7%
110-180°	0	0.0%
0-180°	2,796	100.0%

Luminaire Classification Systems (LCS)

LCS Zone		Lumens	%Lum
FL	0-30	85	3.1%
FM	30-60	749	26.8%
FH	60-80	463	16.6%
FVH	80-90	104	3.7%
BL	0-30	71	2.5%
BM	30-60	679	24.3%
BH	60-80	438	15.7%
BVH	80-90	98	3.5%
UL	90-100	49	1.7%
UH	100-180	61	2.2%
Total		2,796	100.0%
BUG Rating		B1-U3-G2	

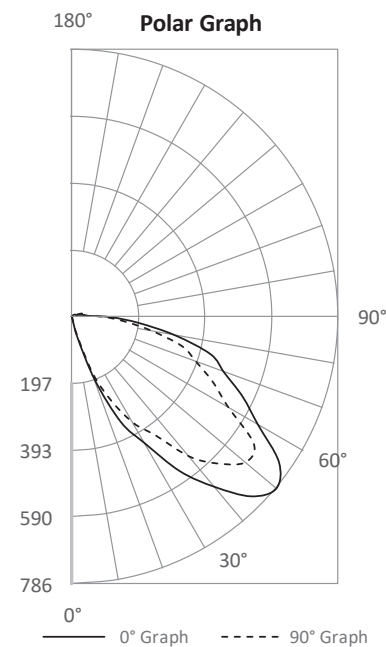

ELECTRICAL DATA

BOL-S-27L-5K

Luminaire Data

Description	BOLLARD (SQUARE) 27L, 5K
Total Lumens	2,760
Input Wattage	21
Efficacy (lm/W)	130
Max. Cd.	757.38 (90H, 51V)
IES Classification	Type VS
Longitudinal Classification	Short

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-30°	153	5.5%
0-60°	1,525	55.2%
0-80°	2,465	89.3%
80-90°	167	6.1%
0-90°	2,632	95.4%
90-110°	90	3.3%
110-180°	0	0.0%
0-180°	2,760	100.0%

Luminaire Classification Systems (LCS)

LCS Zone		Lumens	%Lum
FL	0-30	84	3.0%
FM	30-60	695	25.2%
FH	60-80	463	16.8%
FVH	80-90	79	2.9%
BL	0-30	69	2.5%
BM	30-60	676	24.5%
BH	60-80	477	17.3%
BVH	80-90	88	3.2%
UL	90-100	63	2.3%
UH	100-180	65	2.4%
Total		2,760	100.0%
BUG Rating		B1-U3-G1	

180° Polar Graph

