

GLOW PATH™

LED Bollards



SKU #	DLC Model #
157032	BR01R-3624L-CS-3CCT
157033	BR01R-4224L-CS-3CCT

The GLOWPATH LED Bollard Light from Beyond LED Technology is the ideal choice for enhancing outdoor spaces with both style and performance. Perfect for pathways, walkways, gardens, and landscapes, this bollard light features adjustable wattages (12W, 18W, 24W) and customizable CCT options (3K, 4K, 5K), allowing you to set the perfect lighting atmosphere to suit any setting. Built with die-cast aluminum housing and a polycarbonate lens, the GLOWPATH offers unmatched durability and weather resistance, ensuring reliable operation for years. Delivering up to 110 lumens per watt, it provides bright, energy- efficient lighting, with installation flexibility available in 36" & 42" heights to meet your specific needs.

Product Features

- Up to 110 lm/W
- Available in 36" & 42"
- Adjustable wattage
- Adjustable CCT
- 0-10V Dimmable
- Black Housing
- Input voltage 120-277VAC
- UL & DLC listed
- 5-year warranty

GLOW PATH™

LED Bollards



SKU	ADJ. WATT	MAX LUMENS	ADJ. CCT	INPUT VOLTAGE	CRI	SIZE	DISTRIBUTION PATTERN	CONSTRUCTION	DIMMING	IP RATING	CERTIFICATIONS
157032	12W/18W/24W	2640	3K/4K/5K	120-277V	>70	36"	Type V	Die-cast Aluminum+PC	0-10V	IP65	UL & DLC
157033	12W/18W/24W	2640	3K/4K/5K	120-277V	>70	42"	Type V	Die-cast Aluminum+PC	0-10V	IP65	UL & DLC

SKU: 157032 / 157033 Specifications


Parameter	Description	Value
General Performance	Adjustable Watt	12W / 18 / 24W
	Max Lumens	2640
	Lumen Efficacy	Up to 110LM/W
	Color Temperature	3000K / 4000K / 5000K
	CRI (Ra)	>70
	Light Spread	Type V
	Diffuser Type	Polycarbonate Lens
	Input Voltage	120-277 Vac
Electrical	Frequency	50/60Hz
	Dimming	0-10V
	Power Factor	≥0.90
	Driver Surge Protection	L-N:4KV LN-PG:5KV
	THD	<20%
	Flicker Percent	N/A
Physical	Operating Temperature	-30°C to +45°C
	Operating Humidity	5%RH-95%RH
	Storage Temperature	-40°C to +85°C
	Storage Humidity	N/A
	LED Brand	LUMILEDS
	LED Type	2835
	LED QTY	88 Pcs
	Construction	Die-cast Aluminum
Qualification	Housing Color	Black
	IP Rating	IP65
	Warranty	5 Years Warranty




GLOW PATH™

LED Bollards

Correlated Color Temperature (CCT)

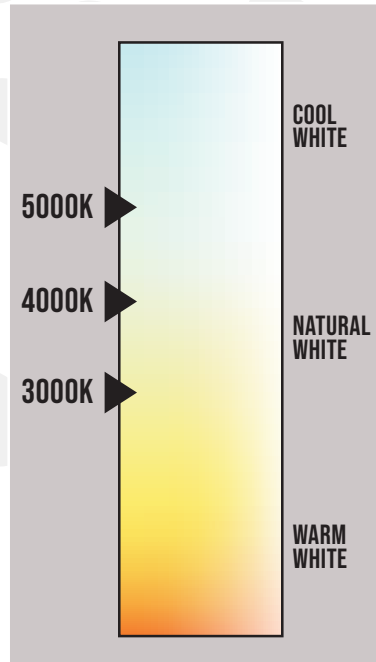

Dimensions

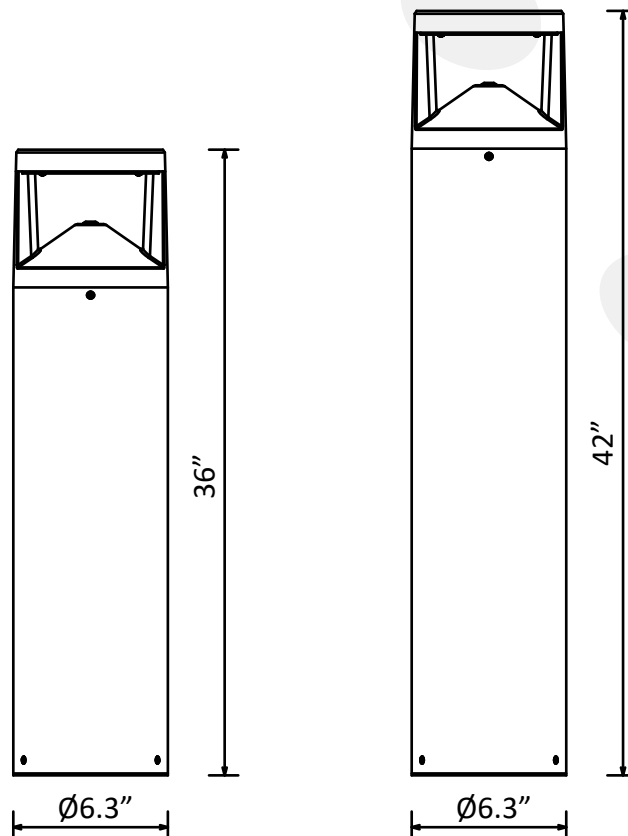

GLOW PATH™

LED Bollards




Product Details



Round shape



DIP switch for 3CCT
& 3Wattages select

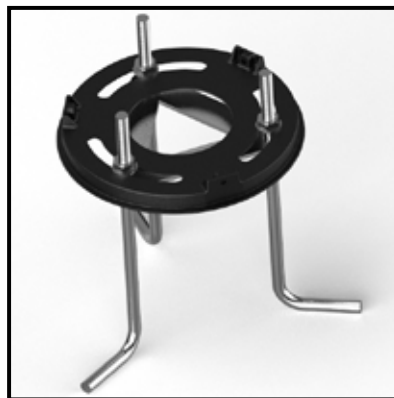

Anchor Bolts install



GLOW PATH™

LED Bollards

Installation

SAFETY INSTRUCTIONS:

Please read all the instructions before attempting installation

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

The lighting fixture must be wired in accordance with the National Electrical Code and all applicable local codes.

Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

WARNING: Must be installed on a level surface, above grade.



GLOW PATH™

LED Bollards




Installation

WARNING: TURN OFF POWER BEFORE CONNECTING WIRES.


Step 1

The anchor bolts are installed on the fixed bracket.

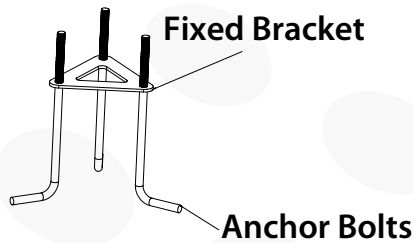


Step 2

Install the anchor bolts and bury them into the ground, and lead out the terminals

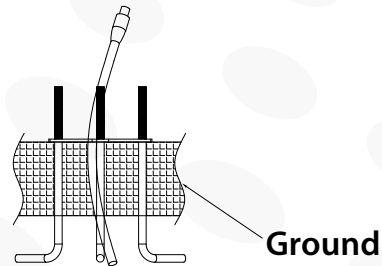


Step 3

Fix the fixed cover on the anchor bolts with nuts.

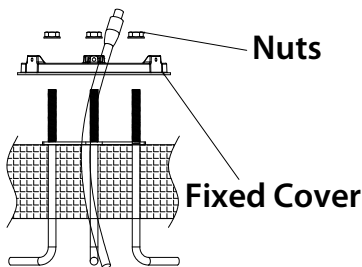


Step 4

Male-female insert wiring.

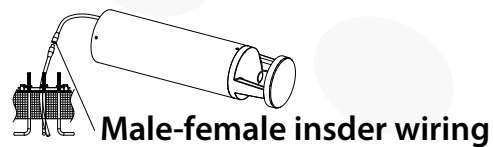

Step 5

Countersunk head screws to fix the bollard base.





GLOW PATH™


LED Bollards

Installation

ON-OFF WIRING


Universal voltage driver permits operation at 120V thru 277V, 50 or 60 Hz. For 0-10V Dimming, follow the wiring directions.

1. Connect the black fixture lead to the LINE supply lead.
2. Connect the white fixture lead to the COMMON supply lead.
3. Connect the GROUND wire from fixture to supply ground. Do NOT connect the GROUND of the dimming fixture to the output.
4. Connect the purple fixture lead to the (V+) DIM lead.
5. Connect the pink fixture lead to the (V-) DIM lead.
6. Cap the yellow fixture lead, if present. Do NOT connect.

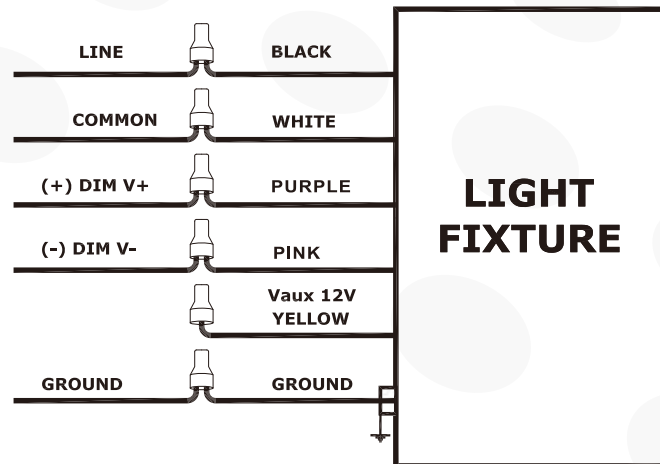

ANCHOR BOLT TEMPLATE FOR BLED BOLLARD

Drawing not to scale. Use the actual mounting plate as your template.

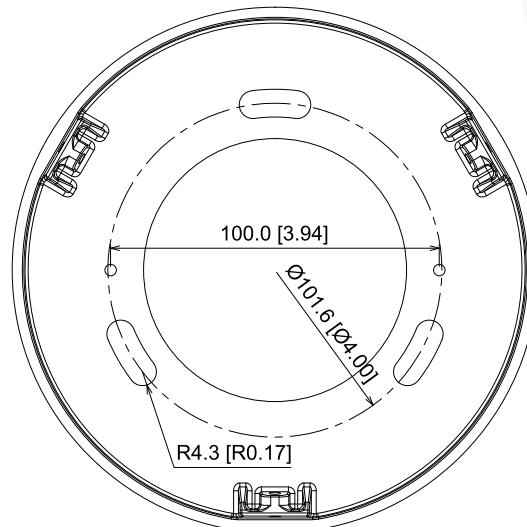

GLOW PATH™

LED Bollards




Installation

WARRANTY:

5-YEAR WARRANTY.

If this product fail to preform satisfactorily due to defect or poor workmanship within five years from the date of purchase, return it to the place of purchase and it will be replaced, free of charge. Inciden-tal or consequential damages are excluded from the warranty.

DIMENSIONAL DRAWING:

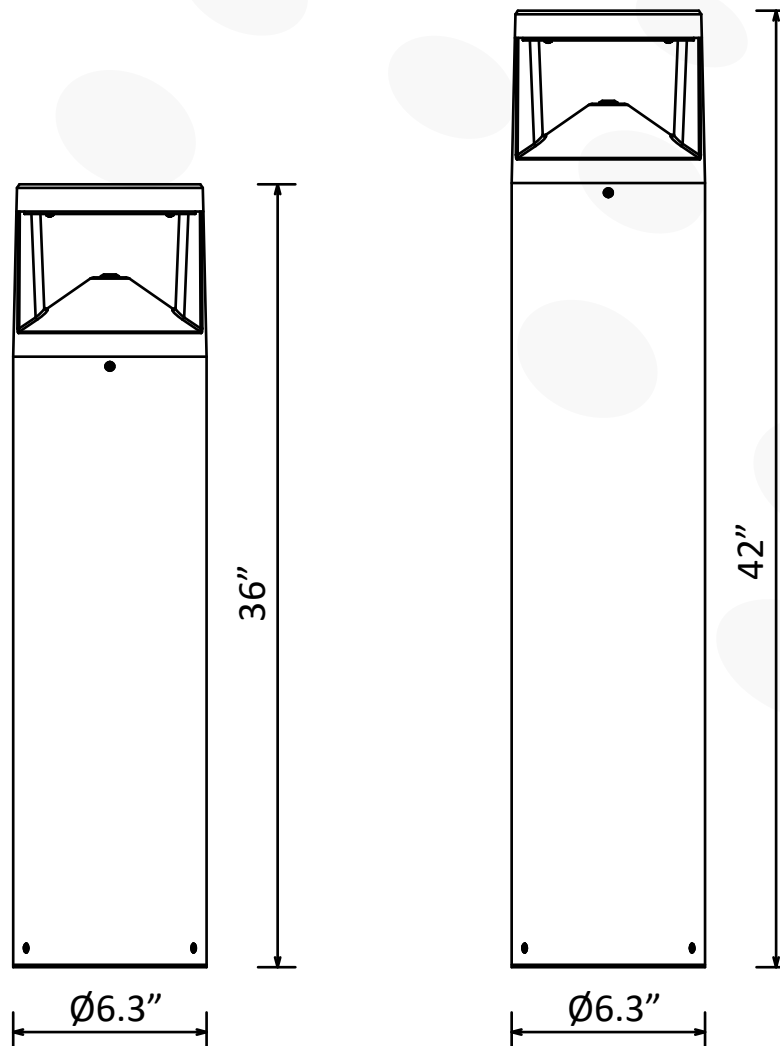



GLOW PATH™

LED Bollards



LED BOLLARDS

GLOW PATH™

LED Bollards



Application Image



LED BOLLARDS

Warranty

This product is covered under a 5-year warranty. For complete warranty details,
[Click Here.](#)