

General Description:

The NebuLite FLM Flood Light is an architectural nice looking LED luminaire. Its unique Anti-glare Lens offers glare-free wide beam spread that perfect for flood light applications.

Construction:

- Low profile architectural look
- Superior heat sinking with external Air-Flow fins
- IP65 for wet and damp locations

Mounting:

- 1/2" Knuckle Mount
- Standard Trunnion Mount

Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V
- FCC compliant

Optical:

- Patented NEMA 6x6 wide beam Fresnel Lens

Controls:

Add-on Button Style photocell

Warranty:

-5 years warranty for complete fixture

Listings:

- UL
- DLC
- RoHS
- IP65



Specs:



Family Model	Lumens	Wattage	lm/W	CCT	CRI	PF	THD	Size	weight	L70
FLM-45W	4,500lm	45W	100lm/W	5000K	80+	>0.95	<20%	8.6"x4.96"x4.33"	6lb	>100,000h
FLM-70W	7,000lm	70W	100lm/W	5000K	80+	>0.95	<20%	8.6"x4.96"x4.33"	6lb	>100,000h



Order Info:

Family	Wattage	CCT	Color	Mounting
FLM	45W=45W	50K=5000K	(omit)=Bronze, Std	KN=Knuckle Mount
=Medium Flood Light	70W=70W		BL=Black	TR=Trunnion Mount
			SL=Silver	
			GR=Gray	
			WH=White	

Photometrics:

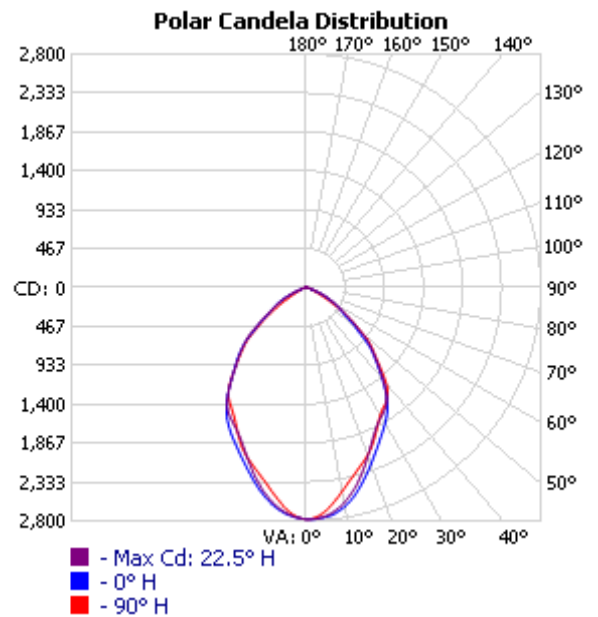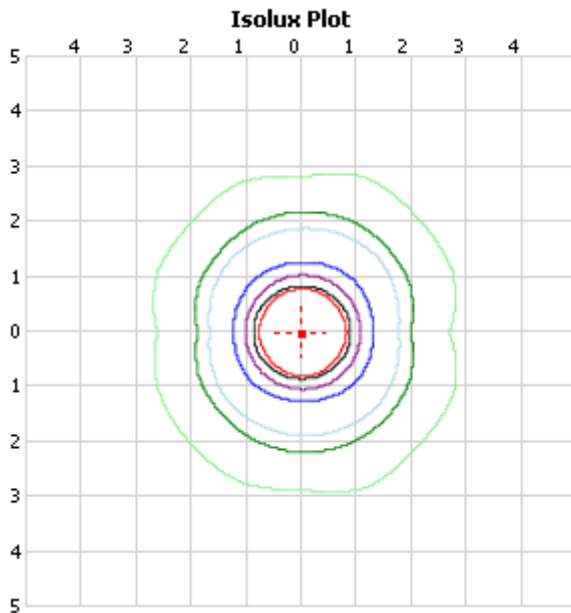

Sample Lighting Layout:

