



LOC-3DWM-UDMW3CCT



LOC-4DWM-UDMW3CCT



LOC-6DWM-UDMW3CCT

CONSTRUCTION:

Constructed with a polycarbonate lens, 6063 Aluminum housing, die-cast Aluminum end caps and mounting plate with a bronze finish.

OPTICAL SYSTEM:

SMD 2835 LED chips. 25°/40°/60° selectable beam angle options.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-347V input.

Operating Temperature: -40°C to 45°C, -40°F to 113°F

Storage Temperature: -40°C to 70°C, -40°F to 158°F

INSTALLATION & MOUNTING:

Wall mounting.

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- **Default Wattage:**
 - 3" 10W
 - 4" 20W
 - 6" 36W
- **Default CCT:**
 - 5,000K
- **Default Beam Angle:** 40°
- Default lighting direction: Full
- Up/Full/Down Light direction selection
- Standard dusk to dawn photocell ON/OFF
- IP65 rated
- No UV or IR in the beam
- No flickering or humming
- Easy installation and maintenance
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Entryway
- Awning
- Facade
- Yards & Loading Docks
- Wall washer

CCT Selectable:

- 3,000K
- 4,000K
- 5,000K

DLC Product ID:

- LOC-3DWM-UDMW3CCT – S-GWKBBKV
- LOC-4DWM-UDMW3CCT – S-PL01PK
- LOC-6DWM-UDMW3CCT – S-9TW5BBJ



WATTAGE	BUG RATING
LOC-3DWM-UDMW3CCT	B1-U4-G0
LOC-4DWM-UDMW3CCT	B1-U4-G0
LOC-6DWM-UDMW3CCT	B2-U4-G0



OPTIONAL ACCESSORY:



Square Shell Case
LOC-ACY-#DWM-SQC
(each size has its own)



LOC-3DWM-UDMW3CCT

WATTAGE SELECTABLE	UP WATTAGE SELECTION	DOWN WATTAGE SELECTION	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
6W/8W/10W	6W/8W/10W	0W	3000K/4000K/5000K	840LM/1,120LM/1,400LM	140lm/W	120V-347V	73	0.93	8.8%
	3W/4W/5W	3W/4W/5W		420LM/560LM/700LM	140lm/W	120V-347V	73	0.93	8.8%
	0W	6W/8W/10W		840LM/1,120LM/1,400LM	140lm/W	120V-347V	73	0.93	8.8%


LOC-4DWM-UDMW3CCT

WATTAGE SELECTABLE	UP WATTAGE SELECTION	DOWN WATTAGE SELECTION	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
12W/16W/20W	12W/16W/20W	0W	3000K/4000K/5000K	1,680LM/2,240LM/2,800LM	140lm/W	120V-347V	73	0.925	12%
	6W/8W/10W	6W/8W/10W		840LM/1,120LM/1,400LM	140lm/W	120V-347V	73	0.925	12%
	0W	12W/16W/20W		1,680LM/2,240LM/2,800LM	140lm/W	120V-347V	73	0.925	12%


LOC-6DWM-UDMW3CCT

WATTAGE SELECTABLE	UP WATTAGE SELECTION	DOWN WATTAGE SELECTION	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
21W/28W/36W	21W/28W/36W	0W	3000K/4000K/5000K	2,841.3LM/3,788.4LM/4,870.8LM	135.3lm/W	120V-347V	83	0.912	16%
	10.5W/14W/18W	10.5W/14W/18W		1,420.65LM/1,894.2LM/2,435.4LM	135.3lm/W	120V-347V	83	0.912	16%
	0W	21W/28W/36W		2,841.3LM/3,788.4LM/4,870.8LM	135.3lm/W	120V-347V	83	0.912	16%

BEAM ANGLE GRAPHIC


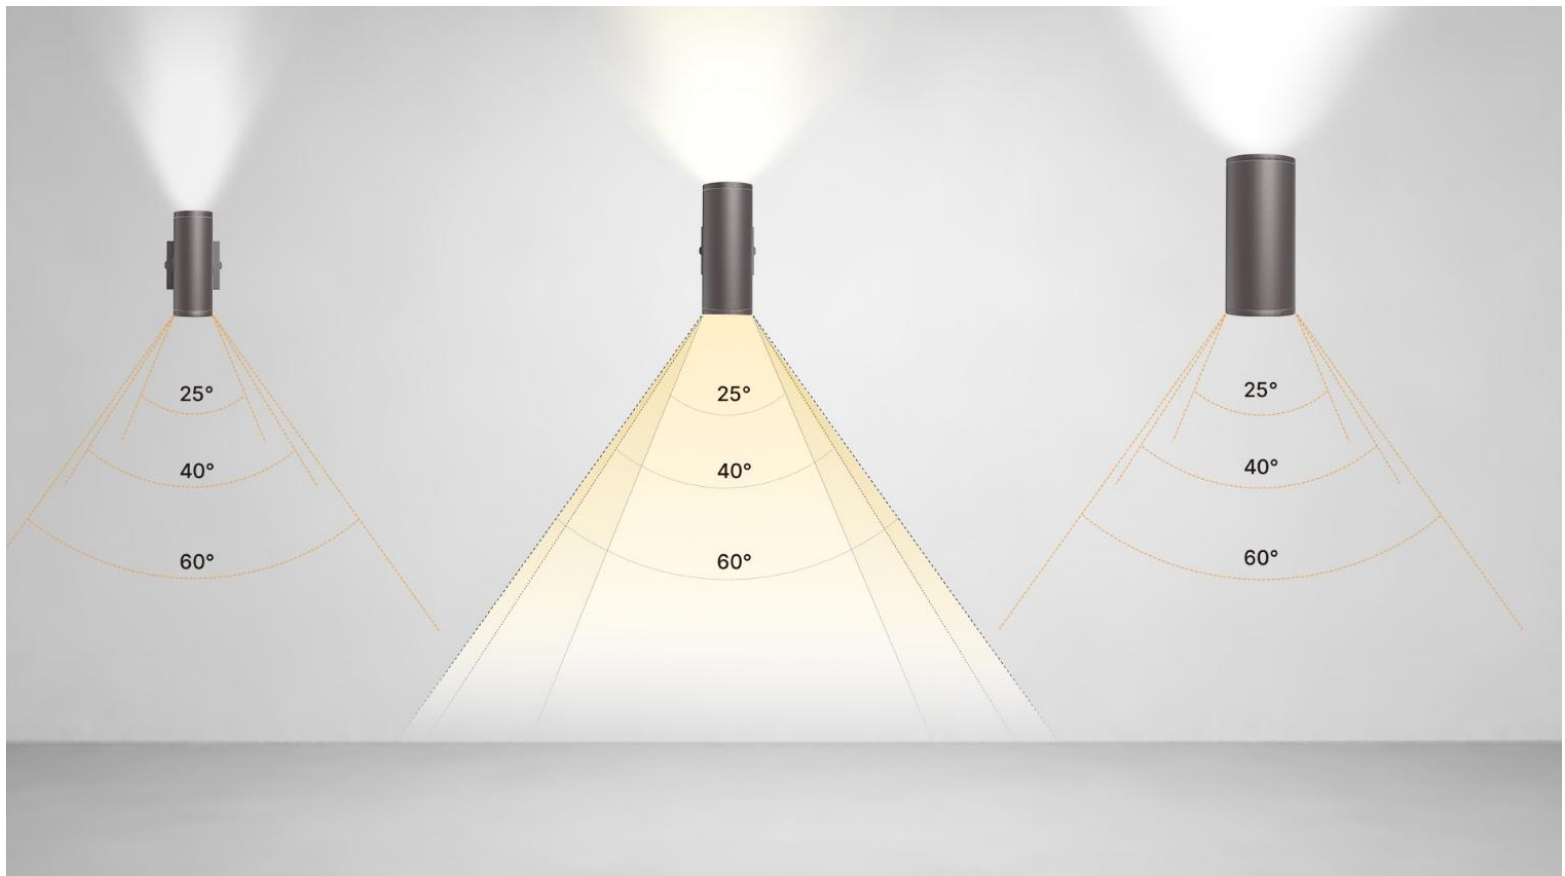


FIELD ADJUSTABLE

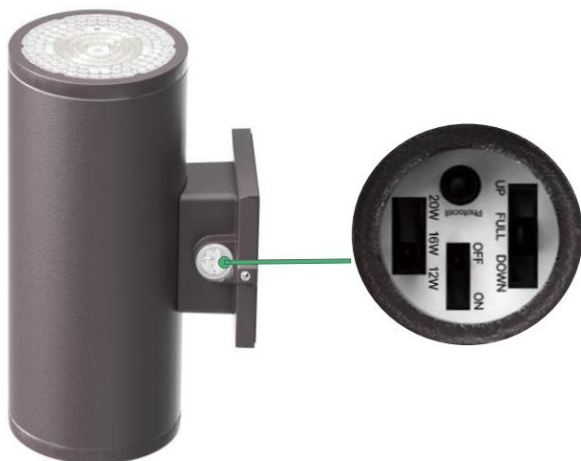


- Field-adjustable Wattage
- Photocell ON/OFF
- Light Direction Selection


FIELD ADJUSTABLE CCT & BEAM ANGLE

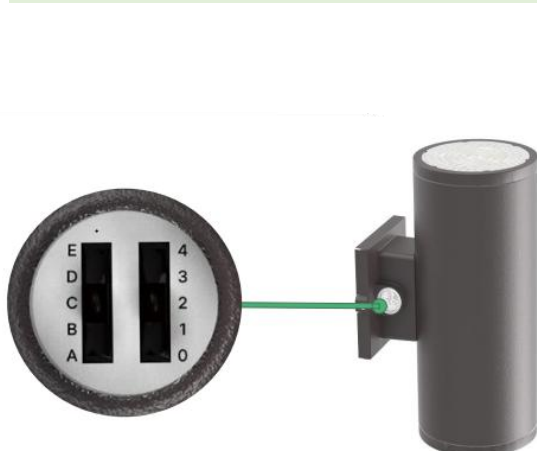

A+1: 3000K 40°
A+2: 4000K 25°
A+3: 5000K 25°
A+4: 3000K 25°




B+0: 5000K 40°
C+0: 5000K 60°
D+0: 4000K 60°
E+0: 3000K 60°




B+1: 5000K 40°
(Factory Default)

LIGHT DIRECTION SELECTION

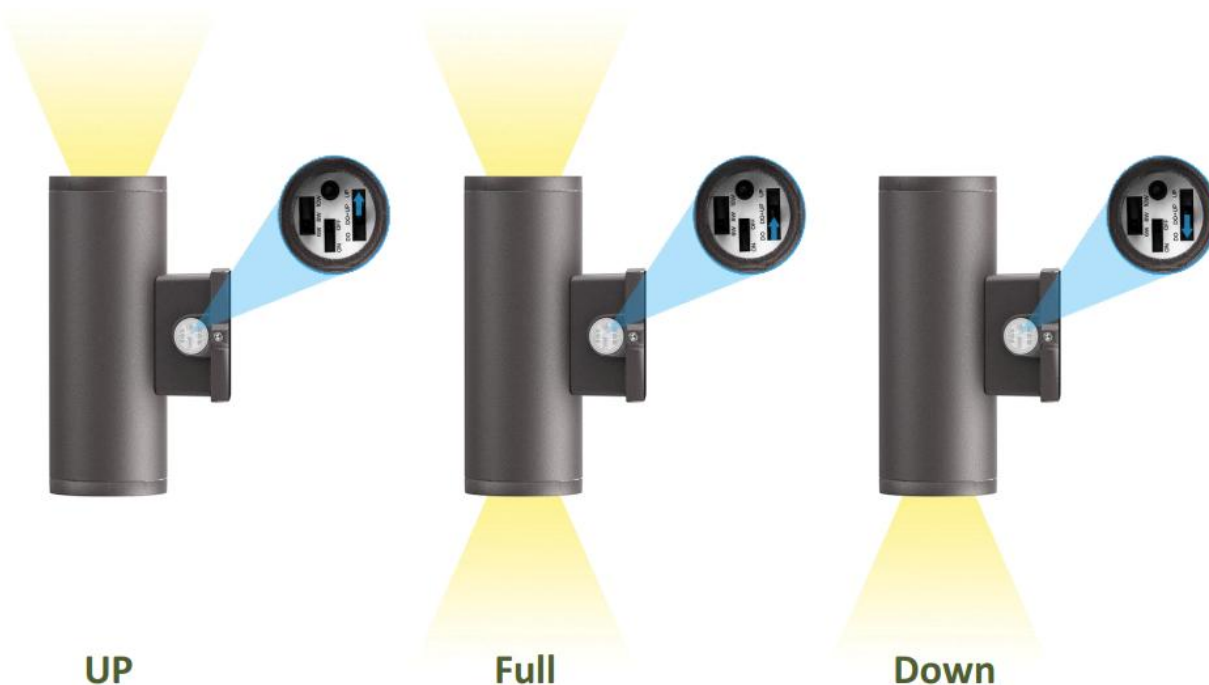


MEASUREMENTS


LOC-3DWM-UDMW3CCT

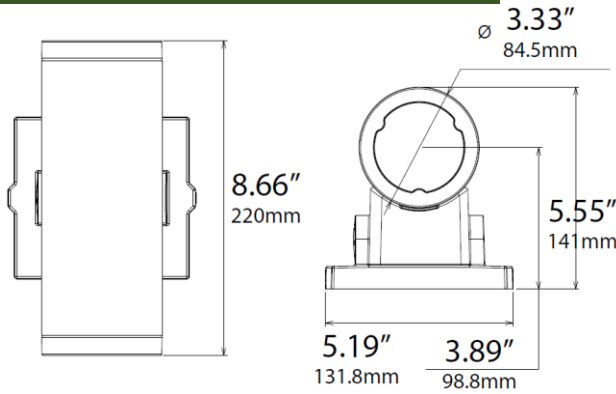

LOC-4DWM-UDMW3CCT

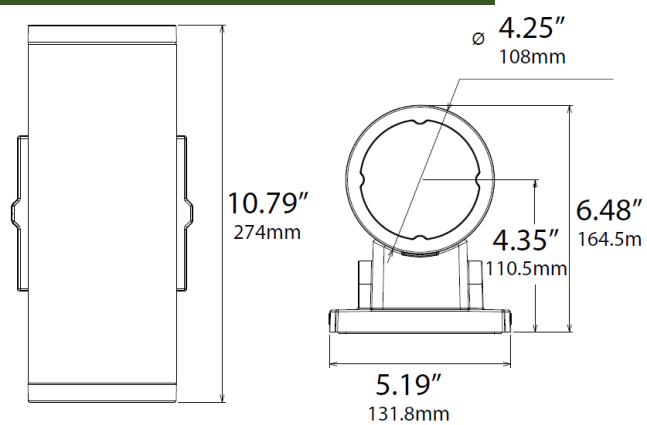


LOC-6DWM-UDMW3CCT

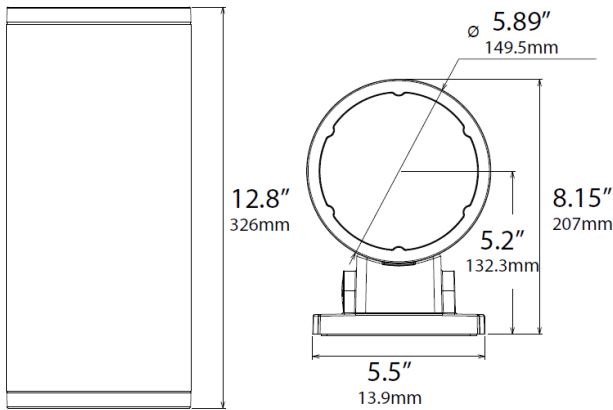


MOUNTING PLATES DIMENSION

(unit: mm & inch)

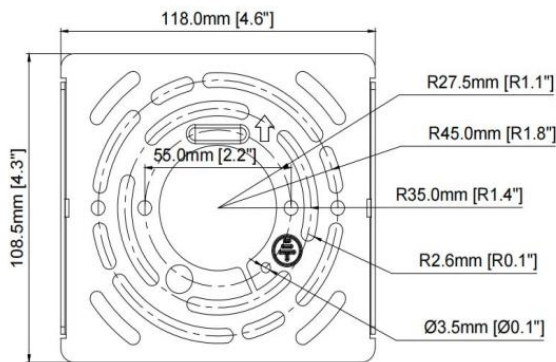

3" & 4"

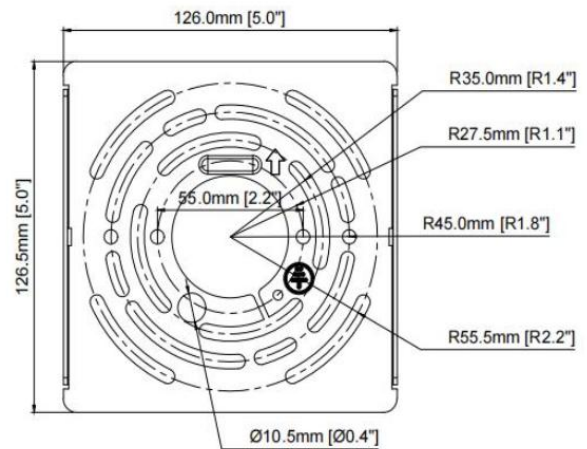

6"

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-3DWM-UDMW3CCT	1	3.42lbs	18.60" x 11.50" x 13.00"	3.75lbs	8	00810050949514
LOC-4DWM-UDMW3CCT	1	4.85lbs	16.90" x 11.70" x 14.80"	5.34lbs	6	00810050949521
LOC-6DWM-UDMW3CCT	1	7.28lbs	13.70" x 13.70" x 18.20"	7.96lbs	4	00810050949538