

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED LOC-WP Wall Pack Light Series



40W, 60W, 80W & 120W

Special Order:

- Other CCTs

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs. Driver is mounted in direct contact with the casting for low operating temperature.

OPTICAL SYSTEM:

Seoul 2835 LED chips. High quality tempered glass optics. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

0-10V dimming comes standard.

Photocell is included.

FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- Semi cut-off
- 50,000 hours lifetime

SUITABLE APPLICATIONS



- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships



MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-WP-40W50KD-LV	40W	5,800LM	145LM/W	80	0.9	20%	70W – 150W HID
LOC-WP-60W50KD-LV	60W	8,700LM	145LM/W	70	0.9	20%	175W – 250W HID
LOC-WP-80W50KD-LV	80W	11,600LM	145LM/W	70	0.9	20%	250W – 320W HID
LOC-WP-120W50KD-LV	120W	17,400LM	145LM/W	80	0.9	20%	320W – 400W HID

Series	Wattage	Color Temperature	Dimming	Voltage
LOC-WP	40W 60W 80W 120W	5000K	Dimmable	LV = 120-277V

MEASUREMENTS

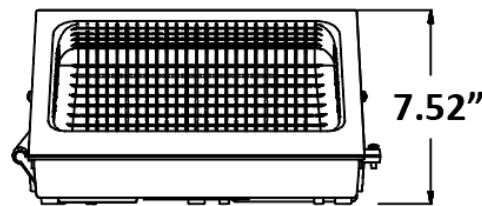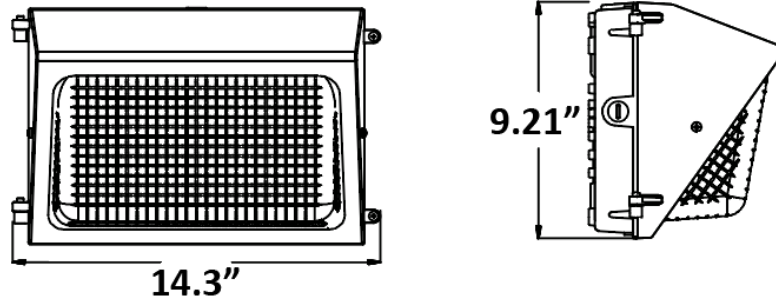

40W, 60W, 80W & 120W

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-WP-40W50KD-LV	1	8.14 lbs	00815586029174
LOC-WP-60W50KD-LV	1	8.14 lbs	00815586029181
LOC-WP-80W50KD-LV	1	8.33 lbs	00815586029198
LOC-WP-120W50KD-LV	1	9.33 lbs	00815586029273

MOUNTING OPTIONS



Quick Mount Back Plate

OPTIONAL ACCESSORIES



Emergency Battery


LOC-EMDR-15W-050




Cut-off Shield

40W

BUG Rating: B2-U3-G3

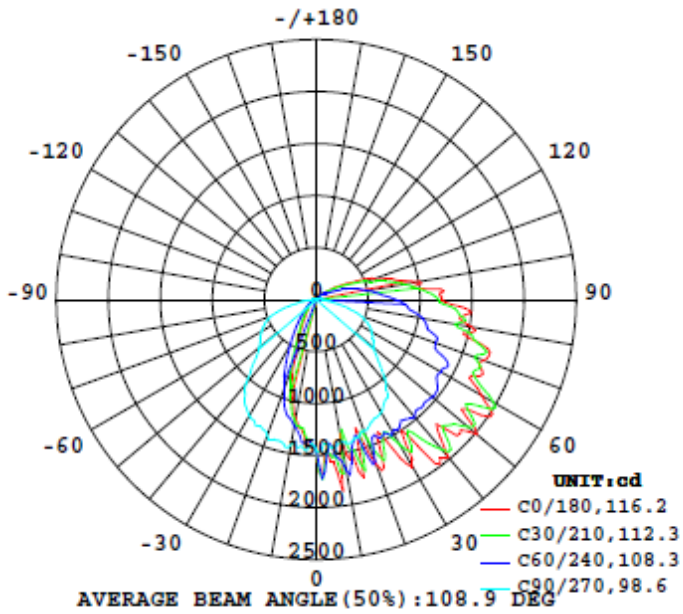


Flux out: 2325 lm

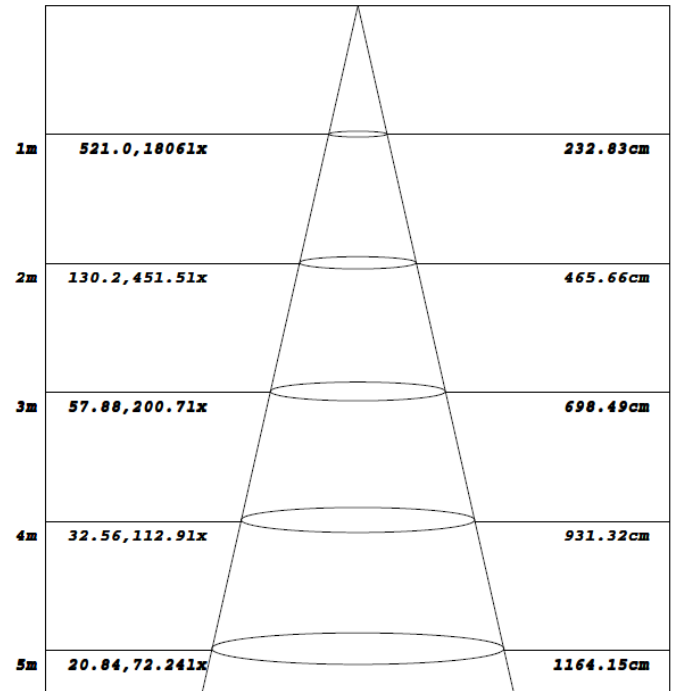


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

60W

BUG Rating: B2-U4-G3

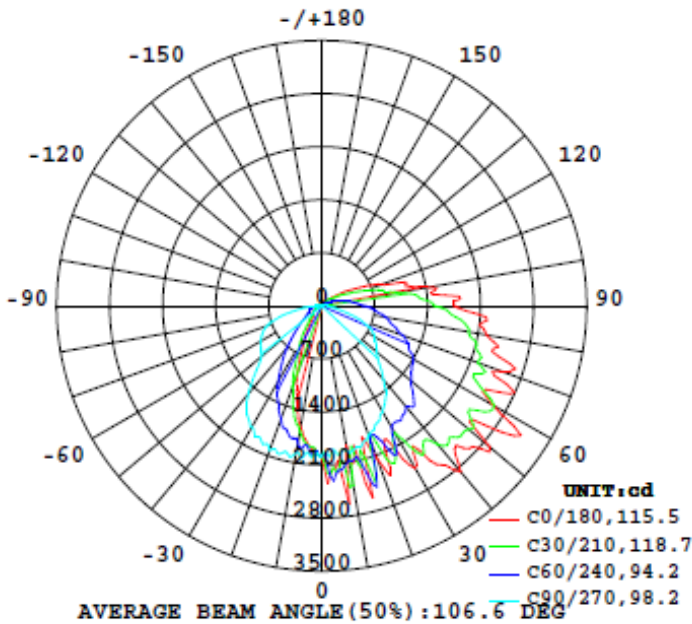



Flux out: 3277 lm

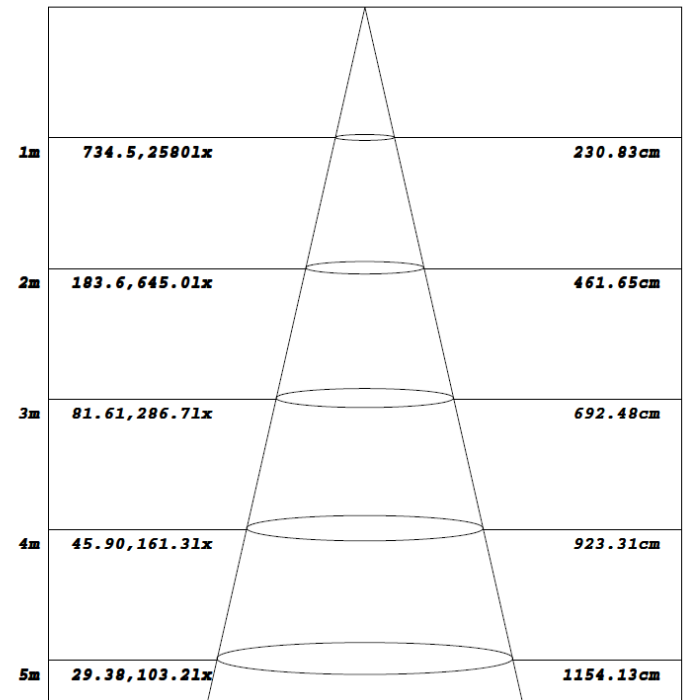

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

80W

BUG Rating: B3-U4-G4

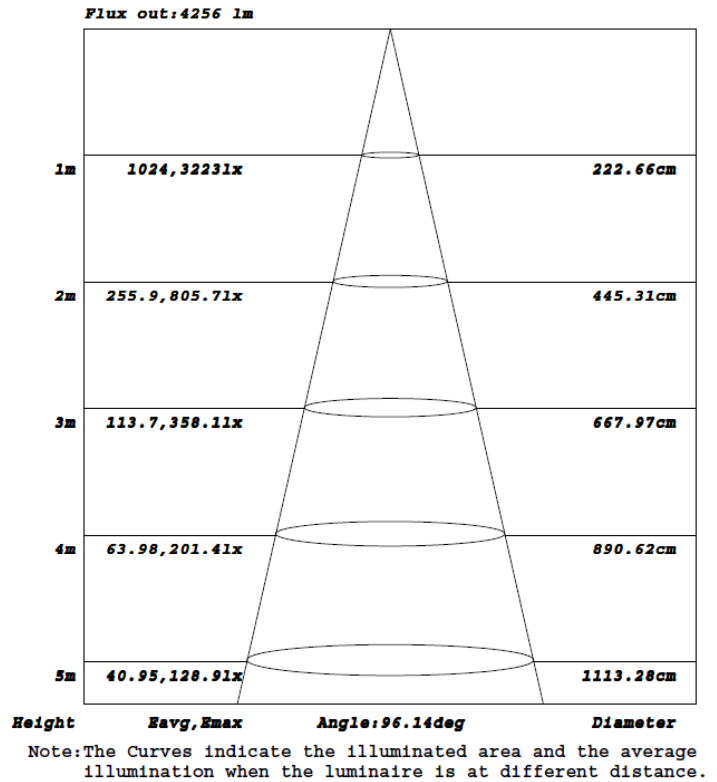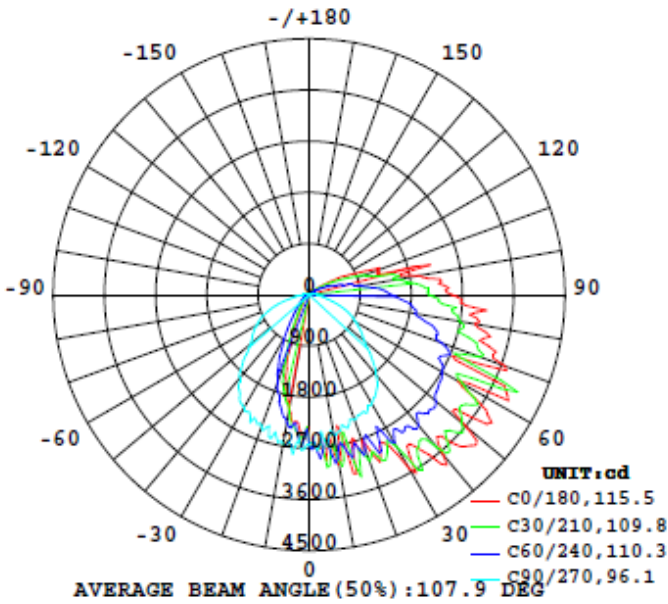

120W

BUG Rating: B3-U5-G5

