

**General Description:**

The NebuLite WPG Wall Pack is a classic wall mounted luminaire integrated with latest LED light engine technology.

**Construction:**

- Heavy duty aluminum housing
- Internal heatsink for long lifespan
- Prismatic PC diffuser
- IP65 for wet and damp locations

**Mounting:**

- Regular in-wall J-box

**Electrical:**

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- 0-10V dimmable optional

**Optical:**

- Glare proof prismatic glass diffuser
- Outstanding 120lm/W

**Controls:**

- 0-10V dimming optional
- Button Style photocell optional

**Warranty:**

- 5 years warranty for complete fixture

**Listings:**

- UL
- DLC
- RoHs
- IP65



**Specs:**



Family Model	Lumens	Wattage	lm/W	CCT	CRI	PF	THD	Size	Weight	L70
WPG-30W	3600lm	30W	120lm/W	3000K-5700K	75+	>0.93	<13%	14.3"x9"x7.7"	10lb	100,000h+
WPG-60W	7200lm	60W	120lm/W	3000K-5700K	75+	>0.93	<13%	14.3"x9"x7.7"	10lb	100,000h+



#### Order Info:

Family	Wattage	CCT	Color	Control	Voltage
<b>WPG</b>	<b>30W=30W</b>	<b>50K=5000K</b>	(omit)=Bronze Std	(omit)=None	(omit)=110-277 Std
=Wall Pack Glass	<b>60W=60W</b>	<b>45K=4500K</b>	<b>BL=Black</b>	<b>PCB=Button Photocell</b>	<b>HV=347V-480V</b>
		<b>40K=4000K</b>		<b>OCC=occupancy Sensor</b>	
		<b>35K=3500K</b>			
		<b>30K=3000K</b>			

#### Photometrics:

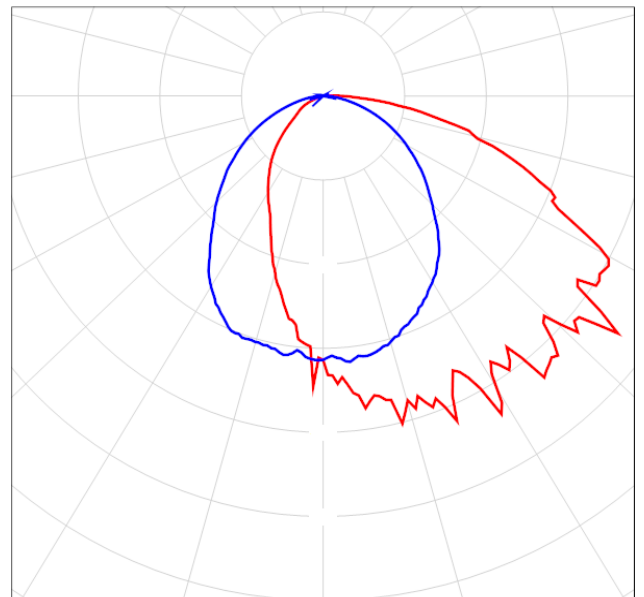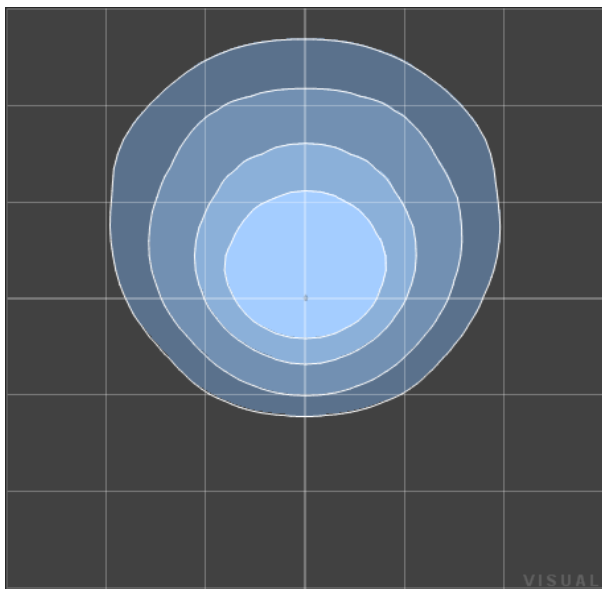

#### Lighting Layout:

