

PT31 & PT32

EasyLED Aeroform Square Post Tops


L70
25°C **327,000 Hours**



PT31
EasyLED Aeroform
Single Arm Open
Square Post Top



PT32
EasyLED Aeroform
Dual Arm Open
Square Post Top

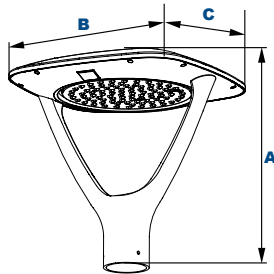

Dimensions

Height (A)	18 1/4" (479mm)
Length (B)	18" (457mm)
Width (C)	18" (457mm)

The Jemm PT31 & PT32 Aeroform Architectural Open Square Post Tops are available in Type II, III, IV or V distributions designed to replace HID lighting systems up to 400w MH or HPS. The fixture mounts to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast and Sand Cast Aluminum Housing, Integral Heat Sinking, Photocell Adaptable.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish:

Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Clear UV-Stabilized Polycarbonate Vandal-Resistant Array Lens with Integral Optics. Gasketed to Seal LED Array

Mounting:

Accommodates "P3" 2 1/8" O.D. x 3" Tenons

EasyLED LED:

Aluminum Boards

Wattage:

37w Array: 37w, System: 41w; (70-150w HID Equivalent)
65w Array: 65.3w, System: 72w; (150-250w HID Equivalent)
100w Array: 100w, System: 111w; (150-250w HID Equivalent)
140w Array: 139.9w, System: 156w; (250-400w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.

Order Information Example:

PT32F140U5KCBSP

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
PT31= EasyLED Aeroform Single Arm Open Square Post Top PT32= EasyLED Aeroform Dual Arm Open Square Post Top	B=Type II C=Type III D=Type IV F=Type V	37=37w 65=65w 100=100w 140=140w	U=120-277V H=347-480V	3K=3000K* 4K=4000K 5K=5000K *37 and 65w Only	C=Clear UV-Stabilized Polycarbonate Array Lens	B=Black C=Custom (Consult Factory)	SF=Single Fuse (120-277V Only) DF=Double Fuse (120-277V Only) SP=Surge Protection R3=3-Pin Twist Lock Photocell Receptacle R5=5-Pin Twist Lock Photocell Receptacle R7=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S2=Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. (120-277V Only) S4=Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'. (120-277V Only) BU=Battery Backup, 90 Minutes (Up to 65w Max)

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:



L70
25°C

327,000 Hours

Accessories & Replacement Parts:



Accessories (Order Separately, Field Installed)

P18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
P18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.
P18140	110-120VAC Instant Twist Lock Photocell
P18150	120VAC Time Delay Twist Lock Photocell
P18152	277VAC Time Delay Twist Lock Photocell
P18156	120-277VAC Universal Twist Lock Photocell
P18157	480VAC Time Delay Twist Lock Photocell. For 480V use only.

Replacement Parts (Order Separately, Field Installed)

P17117	Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz
P17123	Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz

For Replacement Battery Backup, see the LEPC LED Battery Backup Specification Sheet.

EPA (Effective Projected Area)


Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.00	29 Lbs




1.00

29 Lbs


Photometric Data

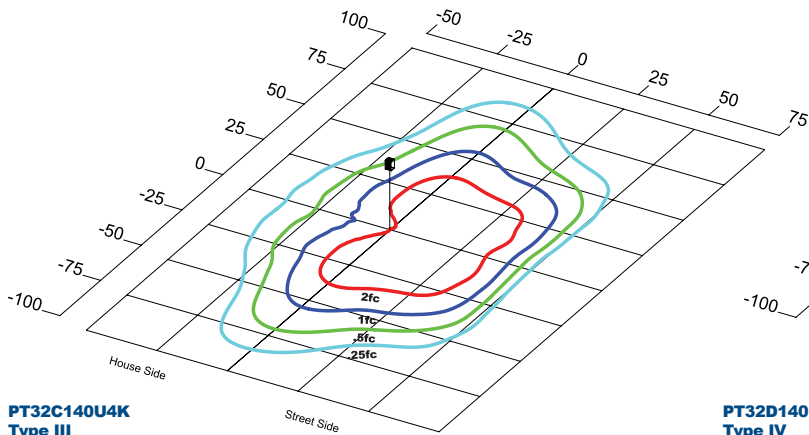

PT32C140U4K
Type III
Grid in MH
MH=25 Feet

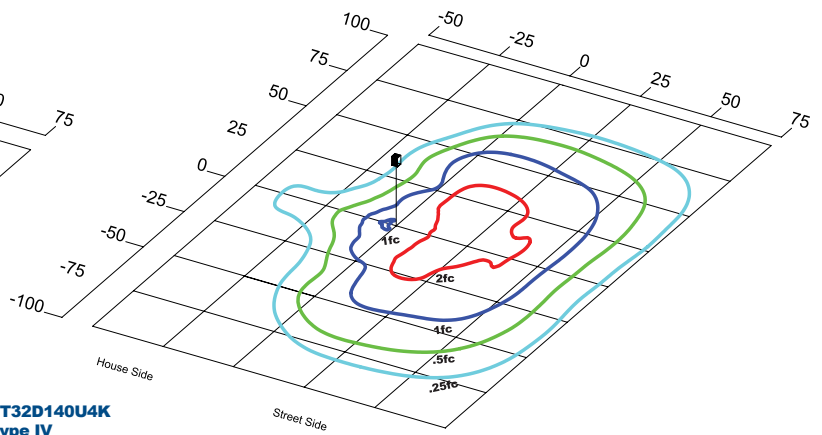

PT32D140U4K
Type IV
Grid in MH
MH=25 Feet

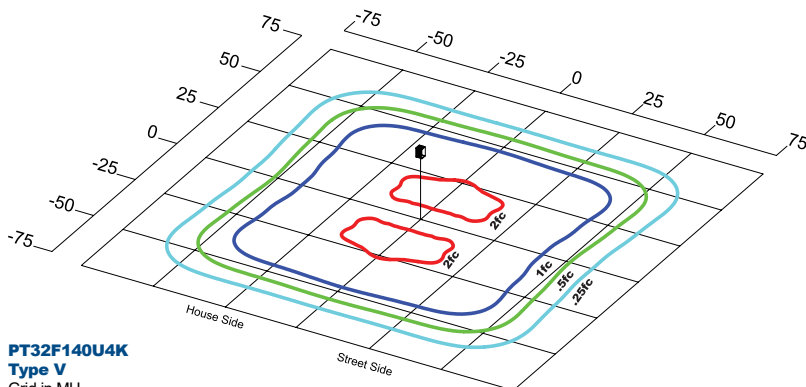

PT32F140U4K
Type V
Grid in MH
MH=25 Feet



PT31 & PT32

EasyLED Aeroform Square Post Tops

L70
25°C

327,000 Hours

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	PT31 4000 CCT 70 CRI					PT32 4000 CCT 70 CRI					
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	
EasyLED 37w	525	42	B	Type II Clear	5,111	122	1	0	1	4,723	113	1	0	1
			C	Type III Clear	5,132	122	2	0	2	4,742	113	1	0	1
			D	Type IV Clear	4,682	112	1	0	2	4,516	108	1	0	2
			F	Type V Clear	5,135	122	3	0	1	4,745	113	3	0	1
EasyLED 65w		74	B	Type II Clear	8,979	121	2	0	2	8,298	112	2	0	1
			C	Type III Clear	9,015	122	2	0	2	8,331	113	2	0	2
			D	Type IV Clear	8,226	111	2	0	3	7,933	107	2	0	3
			F	Type V Clear	9,021	122	3	0	2	8,336	113	3	0	2
EasyLED 100w		114	B	Type II Clear	13,814	121	2	0	2	12,766	112	2	0	2
			C	Type III Clear	13,869	122	3	0	3	12,817	112	3	0	3
			D	Type IV Clear	12,656	111	2	0	3	11,881	104	2	0	3
			F	Type V Clear	13,878	122	4	0	2	12,826	113	4	0	2
EasyLED 140w	159	B	Type II Clear	19,339	122	3	0	3	17,871	112	3	0	3	
		C	Type III Clear	19,417	122	3	0	3	17,943	113	3	0	3	
		D	Type IV Clear	17,717	111	3	0	4	16,392	103	3	0	3	
		F	Type V Clear	19,430	122	4	0	2	17,955	113	4	0	2	

Projected Lumen Maintenance

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 159w	1.00	0.98	0.95	0.91	327,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.94	0.89	0.78	134,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.93	0.86	141,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.