

# WLEZXTEU Compact Wet Location LED Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## STANDARD



## OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).

## DIMENSIONS

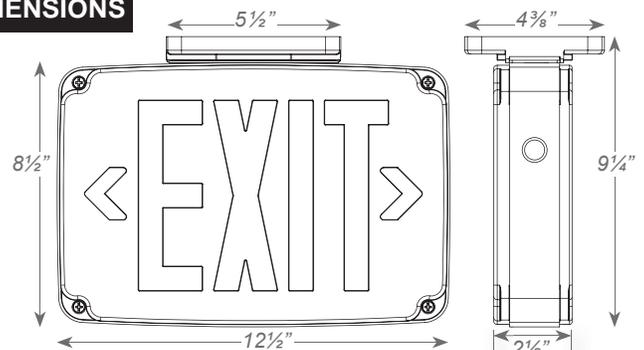

## ORDERING INFORMATION

Sample Part Number: **WLEZXTEU-1-R-W-EM-CW**

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.	MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY				OPTIONS				
		WLEZXTEU	1	Single Face	R	Red	W	White (with white faceplate)	Blank	AC Only	CW	Cold Weather (standard)	SDT
		2	Double Face	G	Green	B	Black (with black faceplate)	EM	Battery Backup			TP	Tamper-Proof
				G	Gray (with white faceplate)							2C	Dual circuit <sup>2</sup>
												Custom	Custom Wording

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units

# WLEZXTEU Compact Wet Location LED Exit Sign

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
WLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011